

# FarAmp 12.8V 100Ah

## Low voltage LFP battery system

### Product Features

- ⊗ High energy density, small size, light weight, no pollution;
- ⊗ 1C rate charge/discharge;
- ⊗ Match varied inverters;
- ⊗ IP20 grade, suitable for indoor;
- ⊗ 10 years design life, Stable performance, maintenance-free;



**✓ Safety Design**  
Much safer  
More reliable.

**Smart Management system**  
Available with,  
Bluetooth, LCD


**⚙️ 1C Charge/Discharge**  
Efficient charging and  
discharging.

**🔑 Single Management**  
Ultimate security and  
ultra-simple O&M.

### Multi-Function

FarAmp lithium series batteries provide superior performance, capacities and reliability. Using state of high power cell technology, the lithium series is designed for environmentally sensitive areas that require super long cycle life capabilities.

FarAmp lithium batteries are widely used in industrial, residential, commercial and private applications. The maintenance free construction and advanced design features makes the lithium series the definitive choice for a wide variety of markets. Like solar and renewable energy storage, electric vehicle, golf cart and industrial equipment, floor machines, forklifts, aerial lifts, and robotics; marine, RV, and no-idle solution; Mobility and Medical Equipment; Telecom, Broadband and Cable TV; UPS systems

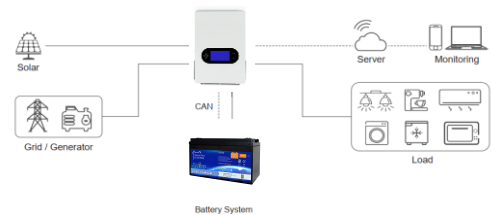

- 🏭 Factory/Office Park/Hotel/Restaurant**  
Arbitraging from the TOU tariff, peak-load shifting
- 🔌 Mobile charger**  
Used as a backup power for household use
- 🏠 Off-grid**  
Multi-energy Energy system with solar, diesel generator, wind turbine, etc.

# FarAmp12.8V100Ah

## Low voltage battery system

### Product Parameters

Model	FarAmp-12.8V100Ah
<b>Battery Parameters</b>	
Battery cell model	LiFePO <sub>4</sub> - 100Ah
Battery capacity	1.28kWh
Dimensions(LxWxH)	330*171*190mm
Weight	14
Terminal Type	T16/Plug
Terminal Torque	8.5N*M
Case Material	ABS
BMS build-in	Yes
Efficiency – round trip	> 99.5
Self Discharge per Month	< 3%
Max parallel connectors	15
Series connections	4
Cycle life (1C, 25°C@100% DOD)	> 4000
Discharge Temperature	-23~65°C
Charge Temperature	-3~65°C
Storage Temperature	-20~45°C
Bluetooth(App)	Optional
LCD Screen	Optional
Heating function	Optional
Voltage Window	10.8~14.6V
Recommend Charge Voltage	14.0V
Max Charge Voltage	14.6V
Recommend Charge current	20A
Max continuous charge current	100A
Recommend Discharge voltage	11.2V
Max Discharging Voltage	10.8V
Max Continuous Discharge current	100A
Peak Discharge Current	120A(3S)
Communication	Bluetooth

\* The system will be derated when the ambient temperature exceeds 45°C.

\*\* The system will be derated when the altitude is between 2000 and 3000m.

### Certifications

**System:** CE(IEC61000,IEC62619,IEC62477),UN3480, UKCA ;

**Pack:** UN38.3;

**Note:** Product specifications are subject to change without any prior notice as per regular modifications made by company.

# FarAmp12.8V100Ah

## Low Voltage LFP battery system

### Performance


#### Constant Current Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.5V)	100A	50A	33A	25A	20A	10A	5A


#### Constant Watts Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.5V)	1280W	640W	425W	320W	256W	128W	64W


Discharge characteristics (25°C)

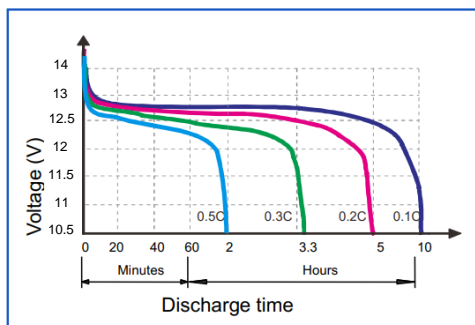


Different temperature Discharge curve (0.5C)

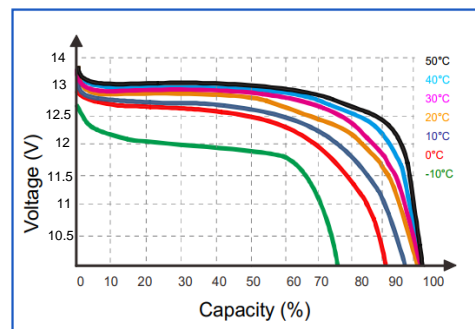

Discharge DOD discharge cycle life curve (0.2C, 25°C)

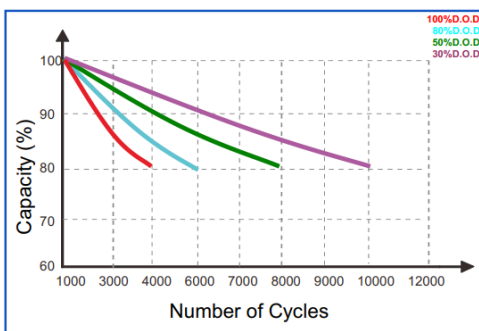

State of charge curve (0.5C, 25°C)

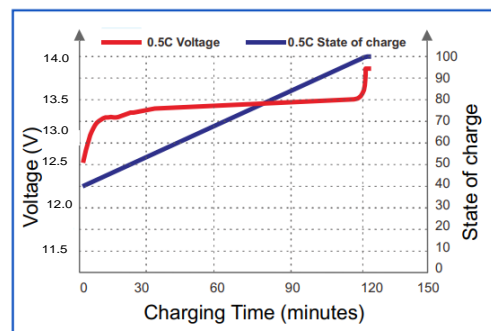

Note 1: Please always refer to the latest edition of our technical manual that published on our website to ensure safe and efficient operation.

Note 2: When make parallel connection, please full discharge batteries, then recharge after parallel connected; when series connect, please keep batteries with same remain capacity.

# FarAmp12.8V150Ah

## Low voltage LFP battery system

### Product Features

- ⊗ High energy density, small size, light weight, no pollution;
- ⊗ 1C rate charge/discharge;
- ⊗ Match varied inverters;
- ⊗ IP20 grade, suitable for indoor;
- ⊗ 10 years design life, Stable performance, maintenance-free;



- |  |  |   |   |
|--|--|---|---|
| <p><b>Double layered Safety Design</b><br/>Much safer<br/>More reliable.</p> | <p><b>Smart Management system</b><br/>Available with,<br/>Bluetooth, LCD</p> | <p><b>1C Charge/Discharge</b><br/>Efficient charging and<br/>discharging.</p> | <p><b>Single Management</b><br/>Ultimate security and<br/>ultra-simple O&amp;M.</p> |
|--|--|---|---|

### Multi-Function

FarAmp lithium series batteries provide superior performance, capacities and reliability. Using state of high power cell technology, the lithium series is designed for environmentally sensitive areas that require super long cycle life capabilities.

FarAmp lithium batteries are widely used in industrial, residential, commercial and private applications. The maintenance free construction and advanced design features makes the lithium series the definitive choice for a wide variety of markets. Like solar and renewable energy storage, electric vehicle, golf cart and industrial equipment, floor machines, forklifts, aerial lifts, and robotics; marine, RV, and no-idle solution; Mobility and Medical Equipment; Telecom, Broadband and Cable TV; UPS systems



- Factory/Office Park/Hotel/Restaurant**  
Arbitraging from the TOU tariff, peak-load shifting
- Mobile charger**  
Used as a backup power for household use
- Off-grid**  
Multi-energy Energy system with solar, diesel generator, wind turbine, etc.

# FarAmp12.8V150Ah

## Low voltage battery system

### Product Parameters

Model	FarAmp-12.8V150Ah
Battery Parameters	
Battery cell model	LiFePO <sub>4</sub> - 150Ah, prismatic
Battery capacity	1.92KWh
Dimensions(LxWxH)	328*172*220mm
Weight	14
Terminal Type	T16/Plug
Terminal Torque	8.5N*M
Case Material	ABS
BMS build-in	Yes
Efficiency – round trip	> 99.5
Self Discharge per Month	< 1.5%
Max parallel connectors	15
Series connections	4
Cycle life (1C, 25°C@100% DOD)	> 4000
Discharge Temperature	-23~65°C
Charge Temperature	-3~65°C
Storage Temperature	-20~45°C
Bluetooth(App)	Optional
LCD Screen	Optional
Heating function	Optional
Voltage Window	11.2~14V
Recommend Charge Voltage	14.2V
Max Charge Voltage	14.6V
Recommend Charge current	30A
Max continuous charge current	100A
Recommend Discharge voltage	11.2V
Max Discharging Voltage	10.8V
Max Continuous Discharge current	100A
Peak Discharge Current	120A(3S)
Communication	Bluetooth

\* The system will be derated when the ambient temperature exceeds 45°C.

\*\* The system will be derated when the altitude is between 2000 and 3000m.

### Certifications

**System:** CE(IEC61000,IEC62619,IEC62477),UN3480, UKCA ;

**Pack:** UN38.3;

**Note:** Product specifications are subject to change without any prior notice as per regular modifications made by company.

# FarAmp12.8V150Ah

## Low voltage battery system



### Performance


#### Constant Current Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	150A	75A	50A	37.5A	30A	15A	7.5A


#### Constant Watts Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	1920W	960W	640W	480W	384W	192W	96W


Discharge characteristics (25°C)

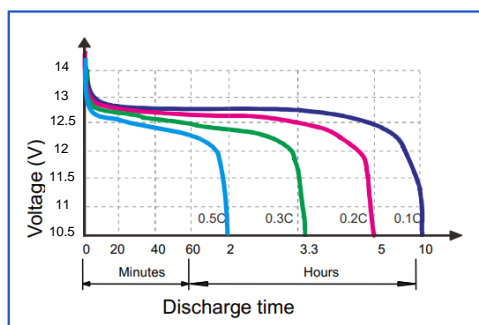


Different temperature Discharge curve (0.5C)

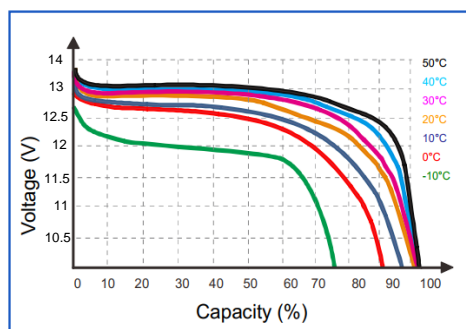

Discharge DOD discharge cycle life curve (0.2C, 25°C)

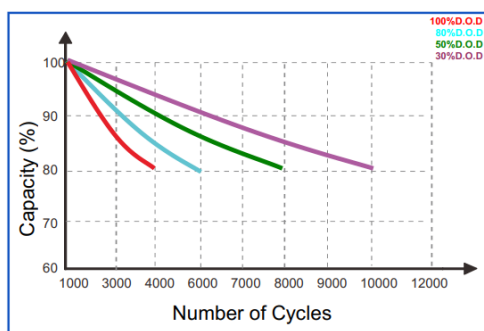

State of charge curve (0.5C, 25°C)

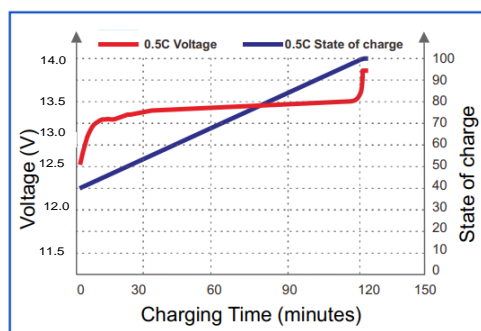

Note 1: Please always refer to the latest edition of our technical manual that published on our website to ensure safe and efficient operation.

Note 2: When make parallel connection, please full discharge batteries, then recharge after parallel connected; when series connect, please keep batteries with same remain capacity.

# FarAmp 12.8V200Ah

## Low voltage LFP battery system

### Product Features

- ⊗ High energy density, small size, light weight, no pollution;
- ⊗ 1C rate charge/discharge;
- ⊗ Match varied inverters;
- ⊗ IP20 grade, suitable for indoor;
- ⊗ 10 years design life, Stable performance, maintenance-free;



**✓ Safety Design**  
Much safer  
More reliable.

**Smart Management system**  
Available with,  
Bluetooth, LCD


**🔌 1C Charge/Discharge**  
Efficient charging and  
discharging.

**🔑 Single Management**  
Ultimate security and  
ultra-simple O&M.

### Multi-Function

FarAmp lithium series batteries provide superior performance, capacities and reliability. Using state of high power cell technology, the lithium series is designed for environmentally sensitive areas that require super long cycle life capabilities.

FarAmp lithium batteries are widely used in industrial, residential, commercial and private applications. The maintenance free construction and advanced design features makes the lithium series the definitive choice for a wide variety of markets. Like solar and renewable energy storage, electric vehicle, golf cart and industrial equipment, floor machines, forklifts, aerial lifts, and robotics; marine, RV, and no-idle solution; Mobility and Medical Equipment; Telecom, Broadband and Cable TV; UPS systems

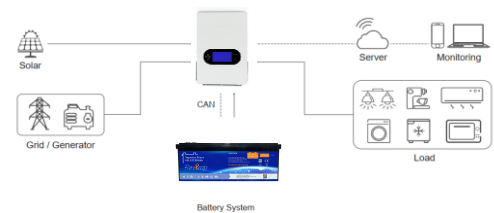

**🏭 Factory/Office Park/Hotel/Restaurant**  
Arbitraging from the TOU tariff, peak-load shifting

**🔌 Mobile charger**  
Used as a backup power for household use

**🏠 Off-grid**  
Multi-energy Energy system with solar, diesel generator, wind turbine, etc.

# FarAmp12.8V200Ah

## Low voltage battery system

### Product Parameters

Model	FarAmp-12.8V200Ah
Battery Parameters	
Battery cell model	LiFePO <sub>4</sub> - 200Ah
Battery capacity	2.56kWh
Dimensions(LxWxH)	485*171*190mm
Weight	22
Terminal Type	T16/Plug
Terminal Torque	8.5N*M
Case Material	ABS
BMS build-in	Yes
Efficiency – round trip	> 99.5
Self Discharge per Month	< 3%
Max parallel connectors	15
Series connections	4
Cycle life (1C, 25°C@100% DOD)	> 4000
Discharge Temperature	-23~65°C
Charge Temperature	-3~65°C
Storage Temperature	-20~45°C
Bluetooth(App)	Optional
LCD Screen	Optional
Heating function	Optional
Voltage Window	10.8~14.6V
Recommend Charge Voltage	14.0V
Max Charge Voltage	14.6V
Recommend Charge current	20A
Max continuous charge current	100A
Recommend Discharge voltage	11.2V
Max Discharging Voltage	10.8V
Max Continuous Discharge current	100A
Peak Discharge Current	120A(3S)
Communication	Bluetooth

\* The system will be derated when the ambient temperature exceeds 45°C.

\*\* The system will be derated when the altitude is between 2000 and 3000m.

### Certifications

**System:** CE(IEC61000,IEC62619,IEC62477),UN3480, UKCA ;

**Pack:** UN38.3;

**Note:** Product specifications are subject to change without any prior notice as per regular modifications made by company.

# FarAmp12.8V200Ah

## Low Voltage LFP battery system

### Performance


#### Constant Current Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.5V)	200A	100A	66A	50A	40A	20A	10A


#### Constant Watts Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.5V)	2560W	1280W	850W	640W	512W	256W	128W


Discharge characteristics (25°C)

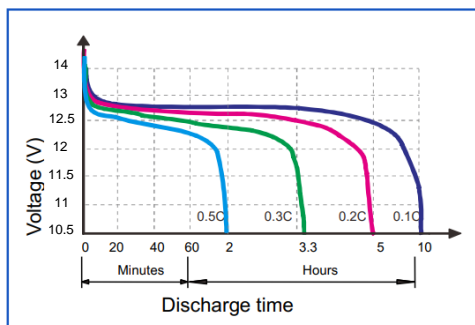


Different temperature Discharge curve (0.5C)

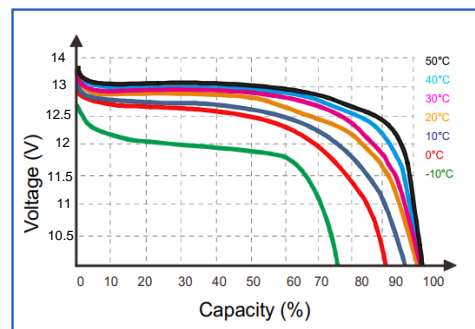

Discharge DOD discharge cycle life curve (0.2C, 25°C)

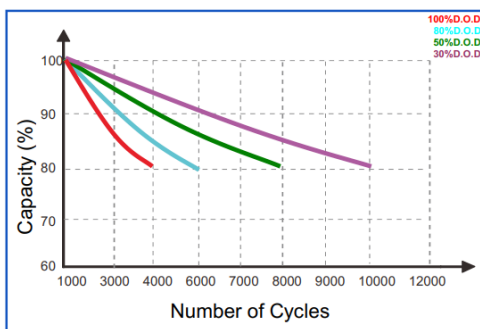

State of charge curve (0.5C, 25°C)

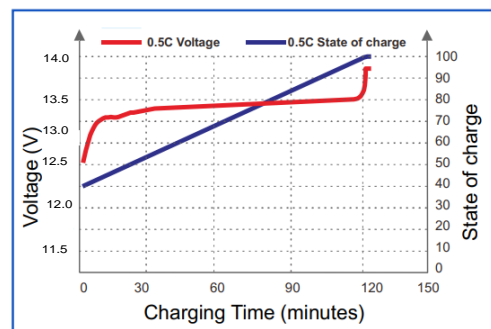

Note 1: Please always refer to the latest edition of our technical manual that published on our website to ensure safe and efficient operation.

Note 2: When make parallel connection, please full discharge batteries, then recharge after parallel connected; when series connect, please keep batteries with same remain capacity.


# FarAmp12.8V280Ah

## Low voltage LFP battery system

FarAmp

### Product Features

- High energy density, small size, light weight, no pollution;
- 0.5C rate charge/discharge;
- IP65 grade, suitable for indoor;
- 10 years design life, Stable performance, maintenance - free;

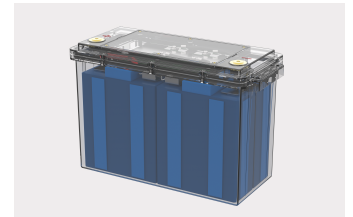

**Safety Design**  
Much safer  
More reliable.

**Smart Management system**


**0.5C Charge/Discharge**  
Efficient charging and discharging.

**Single Management**  
Ultimate security and ultra-simple O&M.

### Multi-Function

FarAmp lithium series batteries provide superior performance, capacities and reliability. Using state of high power cell technology, the lithium series is designed for environmentally sensitive areas that require super long cycle life capabilities.

FarAmp lithium batteries are widely used in industrial, residential, commercial and private applications. The maintenance free construction and advanced design features makes the lithium series the definitive choice for a wide variety of markets. Like solar and renewable energy storage, electric vehicle, golf cart and industrial equipment, floor machines, forklifts, aerial lifts, and robotics; marine, RV, and no-idle solution; Mobility and Medical Equipment; Telecom, Broadband and Cable TV; UPS systems

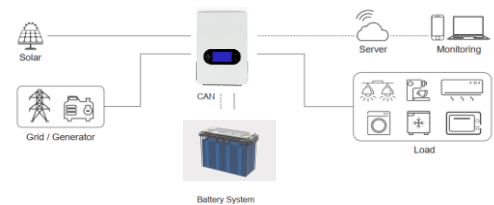

**Factory/Office Park/Hotel/Restaurant**  
Arbitraging from the TOU tariff, peak-load shifting

**Mobile charger**  
Used as a backup power for household use

**Off-grid**  
Multi-energy Energy system with solar, diesel generator, wind turbine, etc.

# FarAmp12.8V280Ah

## Low Voltage battery system

### Product Parameters

Model	FarAmp-12.8V280Ah
<b>Battery Parameters</b>	
Battery cell model	LiFePO <sub>4</sub> - 280Ah
Battery capacity	3.58kWh
Dimensions(LxWxH)	483*170*240mm
Weight	30
Terminal Type	T16/Plug
Terminal Torque	8.5N*M
Case Material	ABS
BMS build-in	Yes
Efficiency – round trip	> 99.5
Self Discharge per Month	< 3%
Max parallel connectors	15
Max Series connections	4
Cycle life (1C, 25°C@100% DOD)	> 4000
Discharge Temperature	-20~65°C
Charge Temperature	0~65°C
Storage Temperature	-20~45°C
Bluetooth(App)	Optional
LCD Screen	Optional
Heating function	Optional
Voltage Window	10.8~14.6V
Recommend Charge Voltage	14.0V
Max Charge Voltage	14.6V
Recommend Charge current	40A
Max continuous charge current	100A
Recommend Discharge voltage	11.2V
Max Discharging Voltage	10.8V
Max Continuous Discharge current	150A
Peak Discharge Current	160A
Communication	NO

\* The system will be derated when the ambient temperature exceeds 45°C.

\*\* The system will be derated when the altitude is between 2000 and 3000m.

### Certifications

**System:** CE(IEC61000,IEC62619,IEC62477),UN3480, UKCA ;

**Pack:** UN38.3;

**Note:** Product specifications are subject to change without any prior notice as per regular modifications made by company.

# FarAmp12.8V280Ah

## Low Voltage LFP battery system

### Performance


#### Constant Current Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	150A	150A	100A	75A	56A	28A	14A


#### Constant Watts Discharge Data (Amperes @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	1920W	1920W	1193W	960W	716W	358W	179W


Discharge characteristics (25°C)

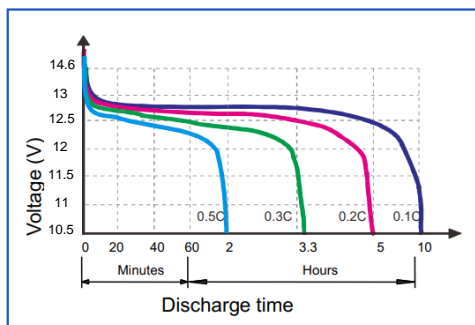


Different temperature Discharge curve (0.5C)

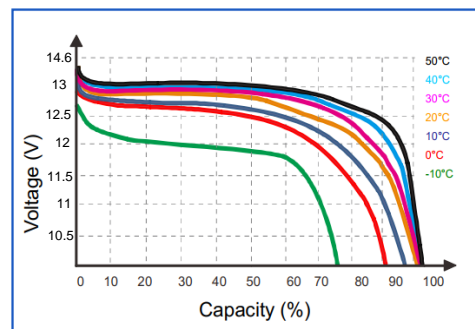

Discharge DOD discharge cycle life curve (0.2C, 25°C)

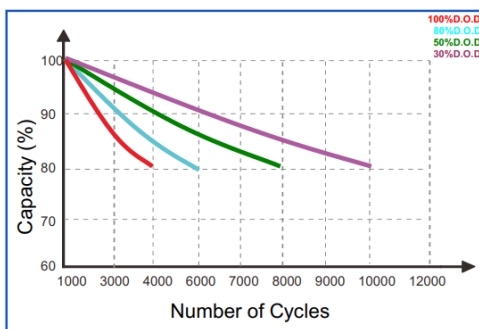

State of charge curve (0.5C, 25°C)

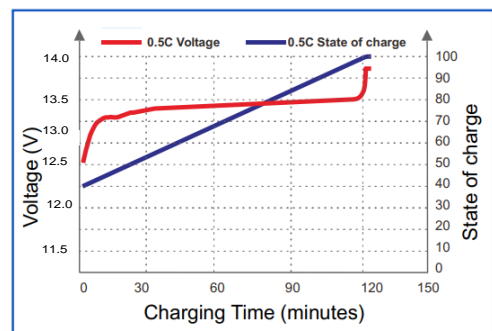

Note 1: Please always refer to the latest edition of our technical manual that published on our website to ensure safe and efficient operation.

Note 2: When make parallel connection, please full discharge batteries, then recharge after parallel connected; when series connect, please keep batteries with same remain capacity.